

XDIwin-F1 Hazardous area gas detector

Remote fixed gas detection
offering local control and display C759C



KEY FEATURES

- Explosion proof
- Rugged and reliable
- 3 alarm points
- 2 alarm relays plus fault relay or 3 alarm relays
- Non intrusive adjustment using magnets
- One man calibration
- Data logging
- Addressable or stand alone
- CANbus, 4~20mA outputs
- Hyper terminal communications / RS232 - live data and set up with 232 adapter
- Back lit alpha numeric full status display
- Wide range of gas types / sensors

The XDIwin-F1 Gas Sensor is capable of utilising a wide range of sensor cell types offering an unmatched number of gases that may be monitored. Standard 4~20mA signaling with CANbus address enables the sensors to be networked via the WatchGas Combi control system or customer preferred monitoring systems.

XDIwin-F1

Hazardous area gas detector



Remote Fixed Gas Detection offering local control and display
C759C

SPECIFICATIONS

WEIGHT	1.6 kg
TEMPERATURE	-15°C to +55°C - safe area use For hazardous area use see temperature ranges on C1227 (Ex certification summary)
HUMIDITY	5 to 95% RH (Non-condensing)
ALARM SIGNAL	Visual: 2 line alpha numeric back lit status display: gas type, concentrating units, alarm levels, alarm status, low / high / over range / fault, sensor ID, inhibit Alarm - Red LED Fault - Amber LED (flashing when in inhibit)
HOUSING & MATERIAL	Copper free aluminium alloy, optional stainless steel Finish: Chemical resistant epoxy paint RAL 9003 – Signal White Optional - Marine grade finish Sensor material - Stainless steel 316516
DATA LOG	Intervals - variable time Roll over/stop Storage - 2,880 readings
POWER SUPPLY	18 to 35vDC 24v nominal
OUTPUTS	<ul style="list-style-type: none"> • 3 wire 4~20mA / 4 wire CANbus • Relays • Low alarm S.P.C.O • High alarm S.P.C.O • Fault alarm S.P.C.O • Rating 0.5A @30vDC • Inhibit option during servicing
CABLE ENTRY	2 x M20 - 1.5 pitch - alternatives 25mm - 3/4 NPT
IP RATING	IP64 + water shield IP65 with hydrophobic screen IP66
SAFETY CERTIFICATION	Explosion proof ATEX IECEx II 2G Ex db IIC T6...T4 Gb II 2D Ex tb IIIC T85°C...T135°C Db
SENSOR TYPE	Infra Red, Electrochemical, Catalytic, Semiconductor, PID
GAS TYPE / RANGE	Flammable gases - LEL / %vol Toxic gases - ppm/ppb Oxygen %vol
ACCESSORIES	003-010 Collector Cone & Universal Fitting 003-020 Universal fitting (Test gas applicator/ spray deflector) 003-035 Water Shield - stainless steel 008-311 Flow Block - nylatron 008-310 Flow Block - stainless steel 003-090 Duct Mount Kit 003-083 Detector Head Weather Shield 003-130 F1 Sensor Thermal Jacket

XDIwin-F1

Hazardous area gas detector



Remote Fixed Gas Detection offering local control and display
C759C



AVAILABLE GASES

GASES	MEASURING RANGE
FLAMMABLE GASES (LEL)	0~100% LEL Catalytic Hydrocarbons, NH ₃ , H ₂
	0~100% LEL Catalytic Hydrocarbons
	0~100% LEL Catalytic Kerosene
O ₂ Oxygen	0~25% Vol Electrochemical
CO Carbon Monoxide	0~200ppm Electrochemical
H ₂ S Hydrogen Sulfide	0~50ppm Electrochemical
SO ₂ Sulfur Dioxide	0~5ppm Electrochemical
NO ₂ Nitrogen Dioxide	0~5ppm Electrochemical
PH ₃ Phosphine	0~10ppm Electrochemical
H ₂ Hydrogen	0~2000ppm Electrochemical
Cl ₂ Chlorine	0~10ppm Electrochemical
HCN Hydrogen Cyanide	0~10ppm Electrochemical
NO Nitric Oxide	0~10ppm Electrochemical
HCl Hydrogen Chloride	0~10ppm Electrochemical
O ₃ Ozone	0~1ppm Electrochemical
NH ₃ Ammonia	0~100ppm Electrochemical
	0~1000ppm Electrochemical
	0~5000ppm Electrochemical
ETO Ethylene Oxide	0~25ppm Electrochemical
ClO ₂ Chlorine Dioxide	0~1ppm Electrochemical
HF Hydrogen Fluoride	0~10ppm Electrochemical
H ₂ O ₂ Hydrogen Peroxide	0~100ppm Electrochemical
Refrigerant Gases	0~1000ppm Semiconductor
VOC PID 10.6 eV Range	0~1000ppm
IR Flammable	Hydrocarbon 0~100% LEL / 0~100 %vol
IR CO ₂	CO ₂ 0~5000 ppm / 0~2 %vol.(Standard) / 0~10 %vol. (Max Range)
	CO ₂ 0~100 %vol
Formaldehyde	0 - 10 ppm

XDIwin-F1

Hazardous area gas detector

Remote Fixed Gas Detection offering local control and display
C759C

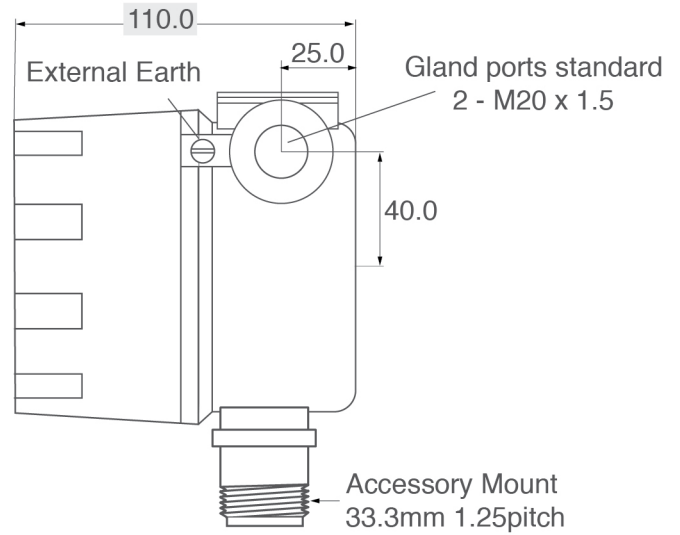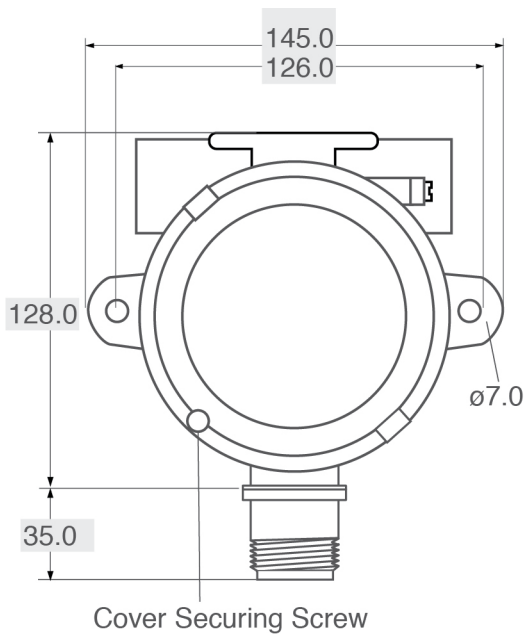

FOR MORE INFORMATION

www.watchgas.com
info@watchgas.com

WatchGas XDIwin-F1 C759C DS EN 09-11-22 v3.1 © 2022 WatchGas B.V.
WatchGas is dedicated to continuously improving its products. Therefore, the specifications and features mentioned in this datasheet are subject to change without prior notice.



Distributed by